



MOTREC™
ELECTRIC VEHICLES FOR INDUSTRY

MOTREC INTERNATIONAL INC.
Gene H. Kruger Industrial Park
200 Des PME Street
Sherbrooke, Quebec
J1C 0R2 CANADA

TF 1-866-846-3558
1-819-846-2010
1-819-846-3050
www.motrec.com

Description:

The E-262 stock chaser is the king of productivity.

Its 60" long deck carries 25% more goods to save return trips and give more time for packing and shipping.

Dual front wheels ensure the stability required to exploit the whole deck area.

Larger drum brakes facilitate the treadle operation to avoid operator fatigue.

Upgraded E-266 comes with a 10 hp motor for trailer towing, and a 36V battery providing 50% more running time.

Benefits:

PRODUCTIVITY. 60" long deck, 25% more cargo space for fewer return trips.

SAFETY. Dual front wheels to ensure stability and exploit the whole deck area.

ERGONOMICS. Light-touch control treadle to avoid operator fatigue.

ENDURANCE. Powerful 6 hp motor.

DEPENDABILITY. Larger self-adjusting drum brakes, shorter stopping distance.

DURABILITY. 14-G diamond-plate steel body.


ROUND-THE-CLOCK OPERATION. Optional roll-out battery box.

E-262



Vehicle shown may have optional accessories

Dimensions:

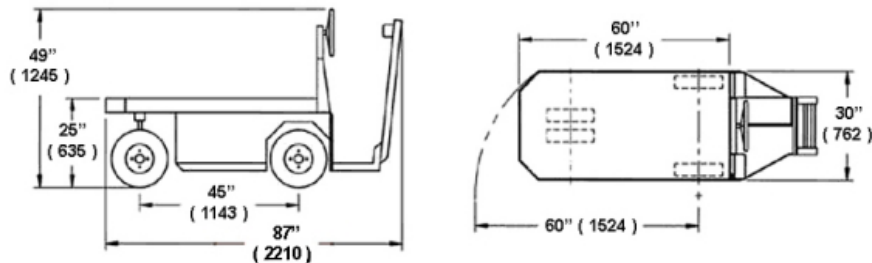

Standard Equipment & Features

Type: 24-Volt Stock Chaser (4 wheels)

Capacity: *1,000 lb. (454 kg)

Speed: 8 mph (13 km/h)

Motor: 6 hp shunt motor

Controller: SEPEX Electronic speed controller, Single right-hand side foot treadle for speed and brake control

Battery: Four 6V-220AH batteries

Charger: High-Frequency Charger, improves battery performance, prevents current surge, 50/60HZ, 110/220VAC

Transmission: Direct drive

Drive axle: Helical gear differential

Brakes: H.D. Drum Brakes, Self-Adjusting,

Steering: Automotive Steering Wheel

Suspension: Rigid axles on front and rear, DUAL FRONT WHEELS, to ensure the stability

Seats: Padded backrest

Indicators: Battery status indicator

Safety features: Reverse alarm, Deadman foot switch, Horn

Lights: Optional

Accessories:

Wheels: 4.8x8 LRB pneumatic tires

Unit weight: 840 lb. (380 kg)

Certifications: Conforms to requirements for type E as stated in UL 583 and ANSI B56.8

Notes: *includes passenger weight of 200 lbs. Specifications and standard equipment are subject to change without notice.



About Motrec

- [History](#)
- [President's Message](#)
- [Motrec Commitment](#)
- [Product Certifications](#)
- [Employment Opportunities](#)
- [Contact Us](#)

Vehicle Selection

- [Burden Carriers](#)
- [Personnel Carriers](#)
- [Trams](#)
- [Stock Chasers](#)
- [Tow Tractors](#)
- [Gas-Powered Vehicles](#)
- [Utility Vehicles](#)
- [Custom Vehicles](#)

Information

- [Motrec Parts](#)
- [End-Users](#)
- [Become a Dealer](#)
- [Newsletters](#)
- [Information Request Form](#)
- [Vehicle Application Form](#)
- [Dealer Login](#)