



PT-75

# COMPACT TRACK LOADER



## Specifications

Operating weight	8972 lbs (4,070 kg)
Tipping load	6,200 lbs (2,812 kg)
Ground pressure	3.5 psi (0.25 kg/cm <sup>2</sup> )
Engine power	71 hp (53 kW)

## Features

- ▶ Multi-level suspension for exceptional traction and operator comfort.
- ▶ Easy operation with pilot-operated joystick controls and comfortable operator station.
- ▶ Optional two-speed hydrostatic drive system offers fast travel speed and high torque work speed.
- ▶ Standard auxiliary hydraulics and hydraulic quick coupler attach easily to a wide range of industry-standard attachments.

**WORKS FOR YOU.™**

# SPECIFICATIONS

## OPERATING SPECIFICATIONS

Operating Weight	8972 lb (4070 kg)
Shipping Weight	8060 lb (3656 kg)
Ground Pressure @ Operating Weight	3.5 psi (24.1 kPa)
Tipping Load	6200 lb (2812 kg)
Operating Capacity 50% Tipping Load	3100 lb (1406 kg)
Operating Capacity 35% Tipping Load	2170 lb (984 kg)
Travel Speed Low Range	0-5.5 mph (8.8 kph)
Travel Speed High Range (with Two Speed Option)	0-10.5 mph (16.8 kph)

## ENGINE

Type	Diesel 4-cylinder turbocharged
Model	Perkins 804C-33T
Displacement	202 in <sup>3</sup> (3.3 L)
Gross Power Rating @ 2800 rpm	71 hp (53 kW)
Torque Peak	178.5 lb-ft (242 Nm)
Cooling System	Engine-driven fan and coolant/anti-freeze-filled radiator
Engine Block Heater	Standard AC plug-in type
Intake Air Cleaner	Dual stage
Emission Controls	Meets all U.S. EPA interim tier 4 standards

## UNDERCARRIAGE

Track Type: General purpose track constructed of rubber compound with embedded co-polymer cords and all-purpose treads. Three rows of track drive lugs molded in. Turf Track with smooth tread available as an option.	
Track Width	Standard - 18 in (457 mm) Optional - 20 in (508 mm)
Length of Track On Ground	71 in (1803 mm)
Ground Contact Area	2556 in <sup>2</sup> (1.65 m <sup>2</sup> )
Ground Contact Area Optional Track	2840 in <sup>2</sup> (1.83 m <sup>2</sup> )
Drive System	Two hydrostatic direct drive sprockets controlled by a single joystick
Track Drive Sprocket	Elevated with low friction replaceable sprocket rollers
Undercarriage Suspension	Two independent torsion axles per undercarriage
Roller Wheels: 24 high-density polyurethane and rubber wheels per track. Wheel bearings protected by metal-faced seals.	
Roller Wheel Diameter	Front wheels - 15 in (381 mm) Other wheels - 10 in (254 mm)

## SERVICE CAPACITIES

Fuel Tank	18 gal (68 L)
Hydraulic Tank	21 gal (79 L)
Engine Coolant/Antifreeze	3 gal (12 L)
Engine Oil Including Filter	9 quarts (8.52 L)



## AUXILIARY HYDRAULIC SYSTEM

Pump capacity	Low: Variable from 0-17.4 gpm (65.9 lpm) High: 30 gpm (113.6 lpm)
System pressure, max.	3,000 psi (20 670 kPa)
Controls	Intermittent via joystick button or continuous via console switch, mode selectable via dash-mounted switch
Couplers	Push-to-connect quick couplers mounted on loader arms. Pressure relief valve mounted to coupler block.
Cooling system	High efficiency side-by-side radiator and oil cooler

## ELECTRICAL SYSTEM


Nominal charge	12 V
Battery	950 CCA
Charging system	90 amp alternator
Outlets	1-12 V port inside operator station
Wiring	Pre-wired for all factory-available accessories

## OPERATOR STATION


Seat: Adjustable contour vinyl seat with built-in operator presence switch and 3-inch (76 mm) wide seat belt.	
Loader Control: Right-hand pilot hydraulic joystick controls loader lift/lower and tilt, plus intermittent control of auxiliary hydraulic.	
Drive Control: Left-hand pilot hydraulic joystick controls machine speed and direction.	
Engine Speed	Foot pedal
Indicators/ Gauges	Engine Oil Low-Pressure Light Hydraulic Oil High-Temperature Light Engine High-Temperature Light Low Battery Voltage Light Tachometer Hour Meter Fuel Gauge
ROPS	Meets SAE J1040 MAY94, ISO 3471:1994
FOPS	Meets SAE J1043 SEPT87, ISO 3449:1992
Illumination	4 - Fixed forward-facing halogen lights 1 - Adjustable rear-facing halogen light 1 - Interior light
Convenience	12 V power port



**DIMENSIONS: GENERAL PURPOSE BUCKET**

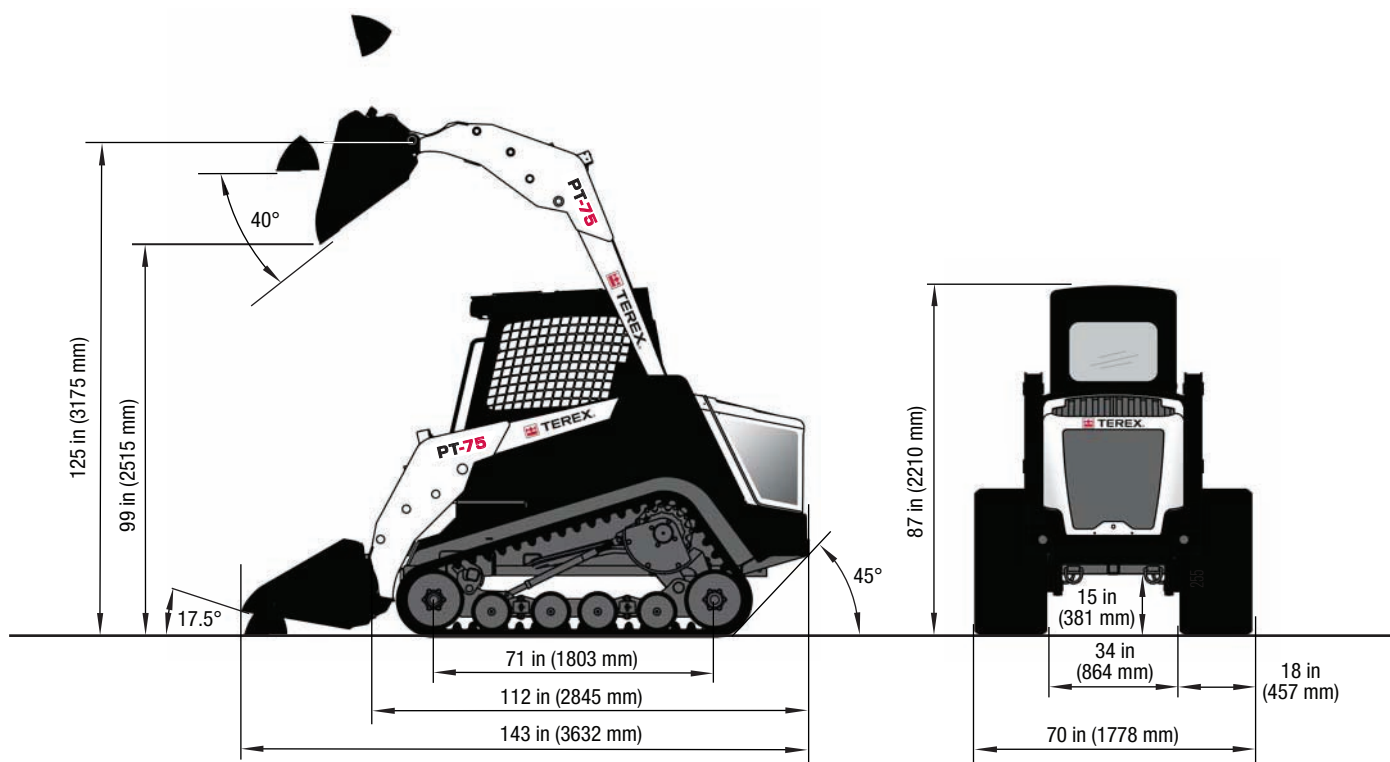

**DIMENSIONS: FORK LIFT ATTACHMENT**

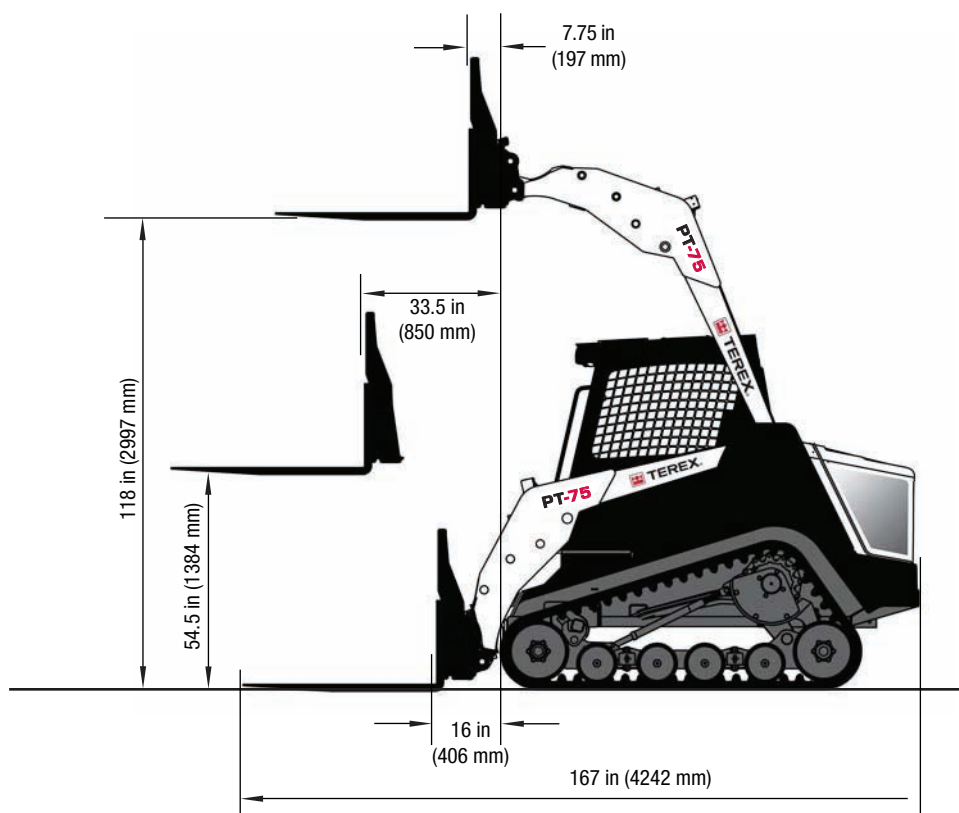

# OPTIONAL EQUIPMENT

## ATTACHMENTS

Auger & bits	Land leveler
Backhoe	Pallet forks
Broom, rotary	Power box rake
Bucket, general purpose	Snow blade
Bucket, light material	Snow blower
Bucket, multi-purpose	Stump grinder
Brush cutter, rotary	Trencher
Dozer blade	Vibratory roller

## OPERATOR STATION OPTIONS

Beacon, rotating	Front door, (glass or polycarbonate)
Bucket positioning, automatic	Suspension seat
Cold-weather cab with wiper and heater	Windows, side, sliding
All-weather cab with wiper, A/C and heater	

[www.terex.com](http://www.terex.com)

Effective Date: April 2013. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks, or trade names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex is a registered trademark of Terex Corporation in the USA and many other countries. © 2013 Terex Corporation.

Terex Construction 8800 Rostin Road, Southaven, MS 38671 USA  
Tel +1 (888) 90-TEREX [www.terex.com](http://www.terex.com)



# TEREX®

## WORKS FOR YOU.™

PT75 042013 PN NEED